

Sec. 10. - Lighting.

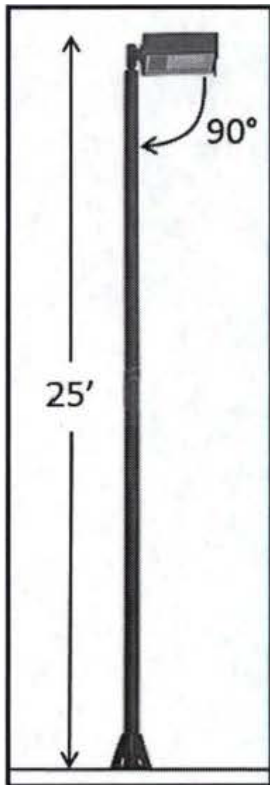


Figure 52-10-1

- A. All lighting, glare, and/or general illumination shall not be cast upon any other properties from which the lighting, glare, and/or general illumination originates.
- B. No lighting, glare, and/or general illumination which flashes, revolves, or otherwise resembles a traffic control signal or in any way creates a hazard for passing traffic shall be permitted.
- C. All exterior lighting shall conform to the New Mexico Night Skies Act.
- D. All signage and street graphics may be backlit or down-lit, but shall not be up-lit.
- E. LED lighting: Specific criteria for LED lighting shall be as follows (see figure 52-10-1):
 - 1. All light poles shall not exceed 25 feet in height with the exception of street lighting in public rights-of-way (ROW) as approved by the city engineer.
 - 2. Lighting shall not exceed 4,000K CCT (correlated color temperature).
 - 3. Light units shall be adjusted to 90 degrees from the light pole and oriented perpendicularly to the ground.
 - 4. Light units shall be shielded to prevent light spilling onto or in the direction of residential areas.